


FARM-MAXX

FTL Series Rotary Tillers

Rugged and Dependable Rotary Tillers for the Value Conscious User

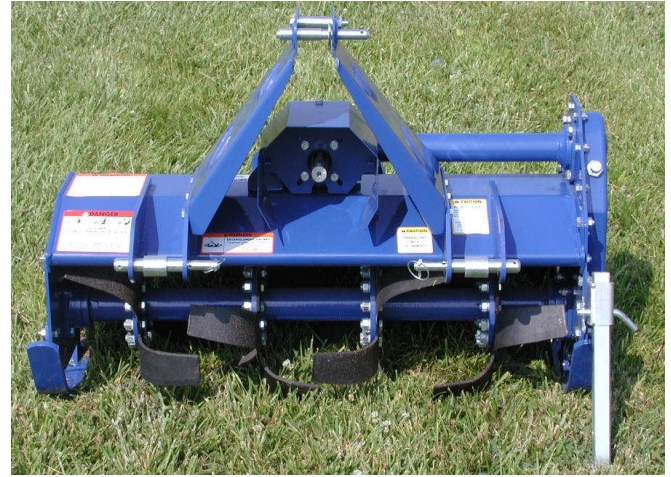

Farm-Maxx FTL Series Rotary Tillers are built tough For years of dependable, top notch service and are popular with landscapers, gardeners, nursery and orchard operators developers, and small farmers.

Two models are offered with working widths of 40 and 48 inches. All models feature heavy duty chain drive transmissions for rugged performance even under the most demanding conditions.

	<u>FTL-40C</u>	<u>FTL-48C</u>
<u>Specifications</u>		
Working Width (In.)	40	48
Working Depth (In.)	7	7
Blades / Flange	6	6
Total Blades	24	36
Side Drive	#80 Chain	#80 Chain
Driveline Protection	Slip Clutch	Slip Clutch
Hitch	Cat0/Cat I	Cat 0/Cat I
PTO Shaft Series	4	4
PTO Power Required (HP)	15-35	15-35
Optimum PTO Speed(RPM)	540	540
Rotor Speed (RPM)	253	253
Rotor Flange Diameter (In.)	6.3	6.3
Rotor Flange Thickness (In.)	0.39	0.39
Approximate Weight W/PTO (LBS)	291	329



- Heavy Duty Drive Housing Shield
- Six Tines Per Flange
- Series 4 Eurocardan PTO Shafts with Slip Clutch are Standard
- Heavy Duty Welded Hitch Plates Offer Multiple Attachement Options
- Automotive Quality Powder Coat Paint Finish
- Heavy Duty Zinc Plated Jack Stand
- Super Heavy Drag Board with Zinc Plated Check Chain
- Convenient Sight Glass for Chain Drive Oil Level is Standard